
Product Data Sheet Item No. 3004-060

Guardrail Net 2.00 x 10.00 m

Schutznetze24 GmbH Weyerberg 5, DE-35614 Aßlar-Berghausen Phone: +49 (0) 6443 - 436 96 40 Maii: office@safetynet365.com Web: www.safetynet365.com





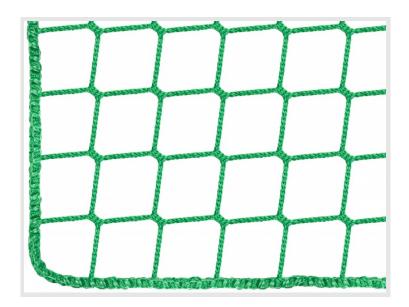



TECHNICAL DATA	
Available Colors	green, blue, fastest availability
Dimensions	6' 7" x 32' 10"
Material	high tenacity polypropylene, knotless
Material Diameter	Ø 0.20" (316")
Mesh Size	2.4" x 2.4"
Pose of Meshs	quadratic (square)
Mesh Connection	knotless braid
Edge Design	reinforced selvage cord of approx. 38", with integral surround rope (sewn)
Max. Tensile Strength of a Mesh	720 lbf
Energy Absorption (approx.)	6.1 kJ
Tensile Breaking Force Referred to Density	7.0 cN/den
Breaking Elongation of Filament	15%
Standards and Rules	BG regulation no. 179, DGUV information 101-011, DGUV information 201-023, EN 1263-1
Certificate	DGUV Eurotest verification certificate 24100003, Oeko-Tex® certificate 12.0.02466
Net Class	A1
Safety Net System	U (safety net in load-bearing construction for vertical use)
Regular Inspection Interval	12 months
Number of Test Meshes	3 pcs.
Continuous Operating Temperature	-40 to +175 °F
Melting Point	329 °F
Washing Temperature (max.)	80 °F
Yarn Moisture Regain	0%
Tensile Strength Reduction Because Of Moisture	0%

very good/good
good/not good
good
very good
good
good
300 kly
90%
good long-term flexibility, little elongation
stays flexible
low contraction
no contraction
melting
isolating, no electrical conductivity
56081930
10.30 oz/yd²
14.11 lb