
Product Data Sheet Item No. 915R

PVC-Coated Polyester Netting 2.00 x 25.00 m

Resistance to Weak/Strong Alkalis	good/not good
Resistance to Organic Solvents	not good
Resistance to Benzine and Greases	very good
Bending Strength & Abrasion Resistance	very good
Weather-Resistance	good
UV-Resistance	300 kly
Elasticity After Years of Climatic Influences	good long-term flexibility, no elongation
Flexibility When Used in Water	stays flexible
Contraction When Used in Water	no contraction
Contraction When Used Outside	no contraction
Behavior in High Heat / Fire	melting
Electrical Characteristics	isolating, no electrical conductivity

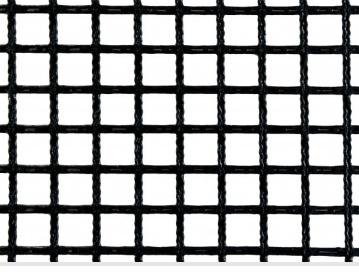

TECHNICAL DATA

Continuous Operating Temperature

Resistance to Weak/Strong Acids

Tensile Strength Reduction Because Of Moisture

Available Colors

Material Diameter

Dimensions Material

Mesh Size

Pose of Meshs

Edge Design

Melting Point

Yarn Moisture Regain

Schutznetze24 GmbH

Weyerberg 5, DE-35614 Aßlar-Berghausen

Phone: +49 (0) 6443 - 436 96 40

Mail: office@safetynet365.com Web: www.safetynet365.com



black 6' 7" x 82'

Ø 0.12" (18")

without edge

-10 to +140 °F

good/not good

356 °F

0%

0%

quadratic (square)

0.8" x 0.8"

polyester, coated with PVC

Customs Tariff No.	56081930
Area Density	23.60 oz/yd²
Total Weight	88.20 lb