


Product Data Sheet Item No. 4305-100
Steel Wire Net with Polyester Coating,
Custom-Made (per m²)

Schutznetze24 GmbH
 Weyerberg 5, DE-35614 Aßlar-Berghausen
 Phone: +49 (0) 6443 - 436 96 40
 Mail: office@safetynet365.com
 Web: www.safetynet365.com

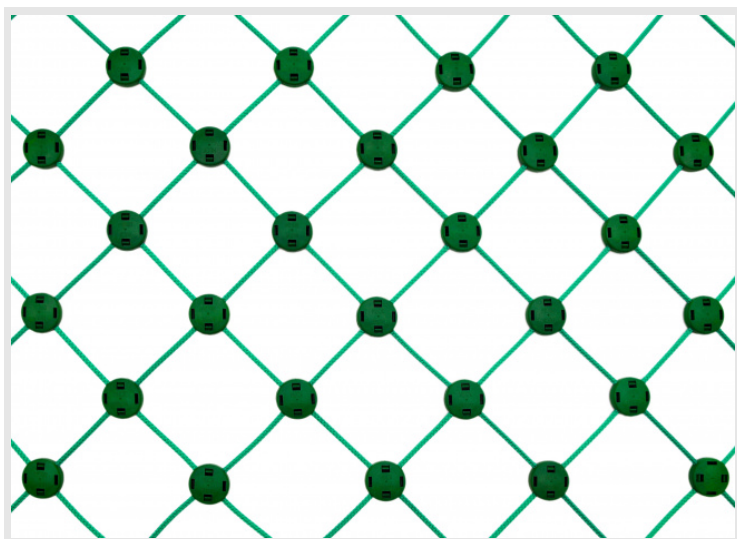

TECHNICAL DATA

Available Colors	green, black
Material	polyester, steel, steel, galvanised, hercules rope Ø 316" (6-strand, covered with polyester, twisted), cut resistant
Material Diameter	Ø 0.20" (316")
Mesh Size	4.0" x 4.0"
Pose of Meshs	rhombic (diamond mesh)
Mesh Connection	plastic clip system (HDPE, Ø 1.38")
Rope Construction	7 x 6 with fibre core
Edge Design	loops
Continuous Operating Temperature	-40 to +212 °F
Melting Point	500 °F
Yarn Moisture Regain	0.5 to 2.0%
Tensile Strength Reduction Because Of Moisture	0%
Resistance to Weak/Strong Acids	good/not good
Resistance to Weak/Strong Alkalis	good/good
Resistance to Organic Solvents	good
Resistance to Benzine and Greases	good
Bending Strength & Abrasion Resistance	good
Weather-Resistance	good
Electrical Characteristics	isolating coating, electrically conducting core
Customs Tariff No.	56081930
Area Density	41.30 oz/yd ²