


Product Data Sheet Item No. SN-016606

Luggage Net 300 x 400 mm, grey

Schutzenetz24 GmbH
Weyerberg 5, DE-35614 Aßlar-Berghausen
Phone: +49 (0) 6443 - 436 96 40
Mail: office@safetynet365.com
Web: www.safetynet365.com

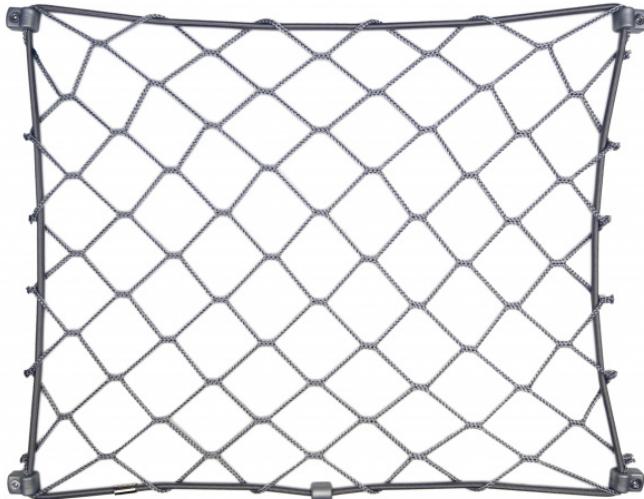

STANDARD
100
12.0.02466
Hohenstein HTTI

TECHNICAL DATA

| | |
|---|--|
| Available Colors | grey |
| Material | high tenacity polypropylene, knotless, polyamide screw-on brackets |
| Material Diameter | Ø 0.10" |
| Mesh Size | 1.6" x 1.6" |
| Pose of Meshes | rhombic (diamond mesh) |
| Mesh Connection | knotless braid |
| Edge Design | adjustable screw-on brackets with screw holes (Ø 164"), shock cord (Ø 316", latex core, polyester cover), threaded all the way round |
| Certificate | Oeko-Tex®; certificate 1904052 |
| Continuous Operating Temperature | -40 to +175 °F |
| Melting Point | 329 °F |
| Washing Temperature (max.) | 80 °F |
| Yarn Moisture Regain | 0% |
| Tensile Strength Reduction Because Of Moisture | 0% |
| Resistance to Weak/Strong Acids | very good/good |
| Resistance to Weak/Strong Alkalies | good/not good |
| Resistance to Organic Solvents | good |
| Resistance to Benzene and Greases | very good |
| Bending Strength & Abrasion Resistance | good |
| Weather-Resistance | good |
| Tensile Strength After Two Years of Climatic Influences | 90% |
| Elasticity After Years of Climatic Influences | good long-term flexibility, little elongation |
| Flexibility When Used in Water | stays flexible |

| | |
|---------------------------------------|--|
| Contraction When Used in Water | low contraction |
| Contraction When Used Outside | no contraction |
| Behavior in High Heat / Fire | melting |
| Included Parts | luggage net, rubber cord, 4 or 5 screw-on brackets (depending on size), fastener for rubber cord |
| Customs Tariff No. | 56081930 |
| Total Weight | 0.13 lb |