
## Product Data Sheet Item No. 1203-060

Aviary Net by the m² (Custom-Made)

Schutznetze24 GmbH Weyerberg 5, DE-35614 Aßlar-Berghausen Phone: +49 (0) 6443 - 436 96 40 Maii: office@safetynet365.com Web: www.safetynet365.com





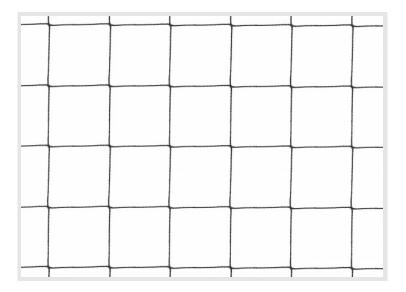



| TECHNICAL DATA  |                                       |
|---|---------------------------------------|
| Available Colors  | black                                 |
| Material  | high tenacity polypropylene, knotless |
| Material Diameter                                       | Ø 0.06" (116")                        |
| Mesh Size   | 2.4" x 2.4"                           |
| Pose of Meshes  | quadratic (square)                    |
| Mesh Connection   | knotless braid                        |
| Edge Design   | without edge                          |
| Max. Tensile Strength of a Mesh                         | 55 lbf                                |
| Tensile Breaking Force Referred to Density              | 7.0 cN/den                            |
| Breaking Elongation of Filament                         | 15%                                   |
| Certificate   | Oeko-Tex® certificate 12.0.02466      |
| Continuous Operating Temperature                        | -40 to +175 °F                        |
| Melting Point   | 329 °F                                |
| Washing Temperature (max.)                              | 80 °F                                 |
| Yarn Moisture Regain                                    | 0%                                    |
| Tensile Strength Reduction Because Of Moisture          | 0%                                    |
| Resistance to Weak/Strong Acids                         | very good/good                        |
| Resistance to Weak/Strong Alkalis                       | good/not good                         |
| Resistance to Organic Solvents                          | good                                  |
| Resistance to Benzine and Greases                       | very good                             |
| Bending Strength & Abrasion Resistance                  | good                                  |
| Weather-Resistance                                      | good                                  |
| UV-Resistance   | 300 kly                               |
| Tensile Strength After Two Years of Climatic Influences | 90%                                   |
|   |                                       |

| Elasticity After Years of Climatic Influences | good long-term flexibility, little elongation |
|---|---|
| Flexibility When Used in Water                | stays flexible                                |
| Contraction When Used in Water                | low contraction                               |
| Contraction When Used Outside                 | no contraction                                |
| Behavior in High Heat / Fire                  | melting                                       |
| Electrical Characteristics                    | isolating, no electrical conductivity         |
| Customs Tariff No.                            | 56081930                                      |
| Area Density                                  | 0.90 oz/yd²                                   |