
## Product Data Sheet Item No. 209-045-4F/2F

Net by the m² (Custom-Made), Colorful

Schutznetze24 GmbH Weyerberg 5, DE-35614 Aßlar-Berghausen Phone: +49 (0) 6443 - 436 96 40 Maii: office@safetynet365.com Web: www.safetynet365.com





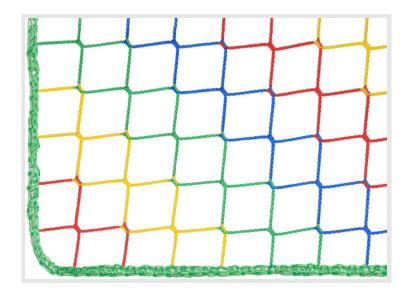



| TECHNICAL DATA  |   |
|---|---|
| Available Colors  | red/green/yellow/blue, green/white, blue/white, red/white |
| Material  | high tenacity polypropylene, knotless                     |
| Material Diameter                                       | Ø 0.12" (18")   |
| Mesh Size   | 1.8" x 1.8"   |
| Pose of Meshes  | quadratic (square)  |
| Mesh Connection   | knotless braid  |
| Edge Design   | reinforced selvage cord of approx. 14"                    |
| Max. Tensile Strength of a Mesh                         | 280 lbf   |
| Tensile Breaking Force Referred to Density              | 7.0 cN/den  |
| Breaking Elongation of Filament                         | 15%   |
| Certificate   | Oeko-Tex® certificate 12.0.02466                          |
| Continuous Operating Temperature                        | -40 to +175 °F  |
| Melting Point   | 329 °F  |
| Washing Temperature (max.)                              | 80 °F   |
| Yarn Moisture Regain                                    | 0%  |
| Tensile Strength Reduction Because Of Moisture          | 0%  |
| Resistance to Weak/Strong Acids                         | very good/good  |
| Resistance to Weak/Strong Alkalis                       | good/not good   |
| Resistance to Organic Solvents                          | good  |
| Resistance to Benzine and Greases                       | very good   |
| Bending Strength & Abrasion Resistance                  | good  |
| Weather-Resistance                                      | good  |
| UV-Resistance   | 300 kly   |
| Tensile Strength After Two Years of Climatic Influences | 90%   |
|   |   |

| Elasticity After Years of Climatic Influences | good long-term flexibility, little elongation |
|---|---|
| Flexibility When Used in Water                | stays flexible                                |
| Contraction When Used in Water                | low contraction                               |
| Contraction When Used Outside                 | no contraction                                |
| Behavior in High Heat / Fire                  | melting                                       |
| Electrical Characteristics                    | isolating, no electrical conductivity         |
| Customs Tariff No.                            | 56081930                                      |
| Area Density                                  | 4.40 oz/yd²                                   |