


# Product Data Sheet Item No. 9100-06

## Custom-Made Barrier Net - Available by the Meter

Schutznetze24 GmbH  
Weyerberg 5, DE-35614 Aßlar-Berghausen  
Phone: +49 (0) 6443 - 436 96 40  
Mail: [office@safetynet365.com](mailto:office@safetynet365.com)  
Web: [www.safetynet365.com](http://www.safetynet365.com)

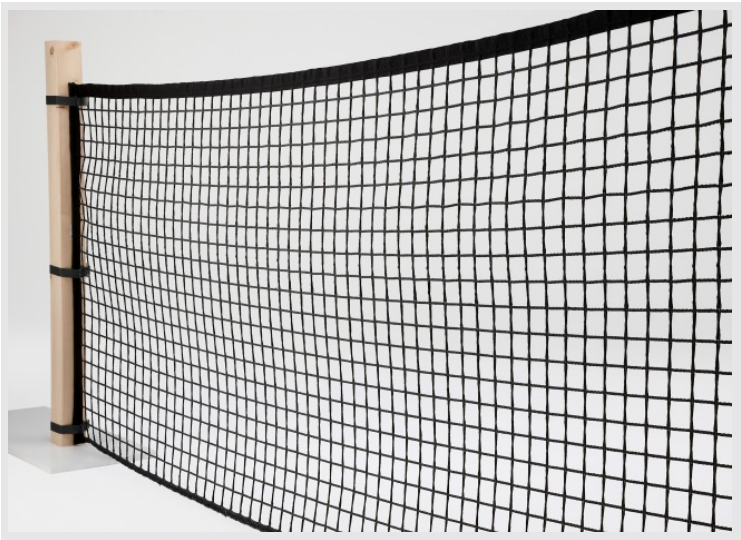

### TECHNICAL DATA

Available Colors	black
Height Above Ground	39.4"
Material	polyester, coated with PVC
Material Diameter	Ø 0.16"
Mesh Size	1.6" x 1.6"
Pose of Meshes	quadratic (square)
Edge Design	with edged polyester tape (2" wide), with sewn on buckled straps (respectively 3 on the left and on the right side), 20" long, with side sewn bars out of fiberglass reinforced plastic
Tensile Strength of Buckle Straps	breaking load when used as restraint: 1,100 lbf
Continuous Operating Temperature	-10 to +140 °F
Melting Point	356 °F
Yarn Moisture Regain	0%
Tensile Strength Reduction Because Of Moisture	0%
Resistance to Weak/Strong Acids	good/not good
Resistance to Weak/Strong Alkalis	good/not good
Resistance to Organic Solvents	not good
Resistance to Benzine and Greases	very good
Bending Strength & Abrasion Resistance	very good
Weather-Resistance	good
UV-Resistance	300 kly
Elasticity After Years of Climatic Influences	good long-term flexibility, no elongation
Flexibility When Used in Water	stays flexible
Contraction When Used in Water	no contraction
Contraction When Used Outside	no contraction

<b>Behavior in High Heat / Fire</b>	melting
<b>Electrical Characteristics</b>	isolating, no electrical conductivity
<b>Customs Tariff No.</b>	56081930