


**Product Data Sheet Item No. 7667-06**  
**Air-Permeable Cargo Cover Sheet 2.70 x 3.10**  
**m**

Schutznetze24 GmbH  
Weyerberg 5, DE-35614 Aßlar-Berghausen  
Phone: +49 (0) 6443 - 436 96 40  
Mail: office@safetynet365.com  
Web: www.safetynet365.com

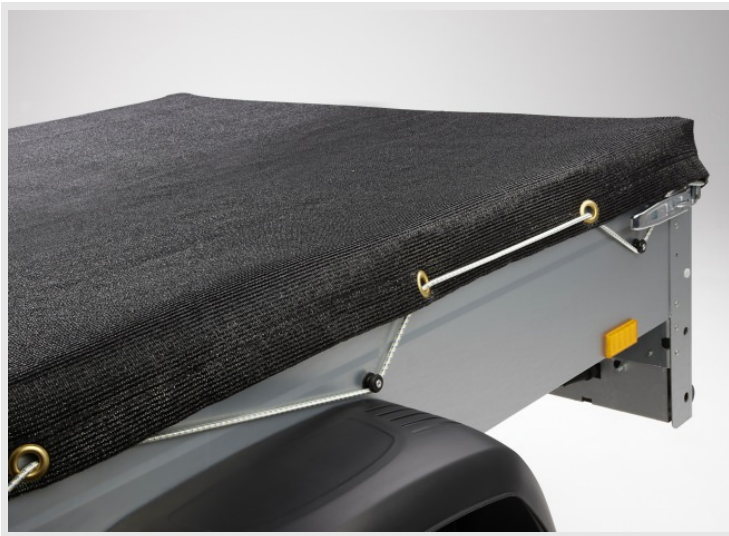

**TECHNICAL DATA**

<b>Available Colors</b>	black
<b>Dimensions</b>	8' 10" x 10' 2"
<b>Material</b>	polyethylene
<b>Type of Textile</b>	closemesh fabric panels, air and water permeable
<b>Mesh Size</b>	0.04" x 0.12"
<b>Shading</b>	50%
<b>Edge Design</b>	with reinforced and stitched edges all around (approx. 1.12" wide)
<b>Eyelets</b>	inside diameter Ø 58", all around, with chosen spacing (standard every 20")
<b>Shock Cord</b>	incl. pulled in shock cord, Ø 14"
<b>Breaking Force</b>	130 lbf (average lengthways)
<b>Breaking Elongation of Filament</b>	15%
<b>Standards and Rules</b>	VDI standard 2700
<b>Certificate</b>	Oeko-Tex®; certificate 12.0.02466
<b>Continuous Operating Temperature</b>	-20 to +140 °F
<b>Melting Point</b>	311 °F
<b>Yarn Moisture Regain</b>	0%
<b>Tensile Strength Reduction Because Of Moisture</b>	0%
<b>Resistance to Weak/Strong Acids</b>	very good/good
<b>Resistance to Weak/Strong Alkalis</b>	good/good
<b>Resistance to Organic Solvents</b>	good
<b>Resistance to Benzine and Greases</b>	very good
<b>Bending Strength &amp; Abrasion Resistance</b>	good
<b>Weather-Resistance</b>	good
<b>UV-Resistance</b>	250 kly

<b>Tensile Strength After Two Years of Climatic Influences</b>	90%
<b>Elasticity After Years of Climatic Influences</b>	good long-term flexibility, no elongation
<b>Flexibility When Used in Water</b>	stays flexible
<b>Contraction When Used in Water</b>	low contraction
<b>Contraction When Used Outside</b>	low contraction
<b>Behavior in High Heat / Fire</b>	melting
<b>Electrical Characteristics</b>	isolating, no electrical conductivity
<b>Customs Tariff No.</b>	63079010
<b>Area Density</b>	7.10 oz/yd <sup>2</sup>
<b>Total Weight</b>	7.17 lb