


**Product Data Sheet Item No. 18043-100**  
**Fall Safety Net 7.50 x 15.00 m (Diagonal**  
**Meshes)**

Schutznetze24 GmbH  
 Weyerberg 5, DE-35614 Aßlar-Berghausen  
 Phone: +49 (0) 6443 - 436 96 40  
 Mail: office@safetynet365.com  
 Web: www.safetynet365.com

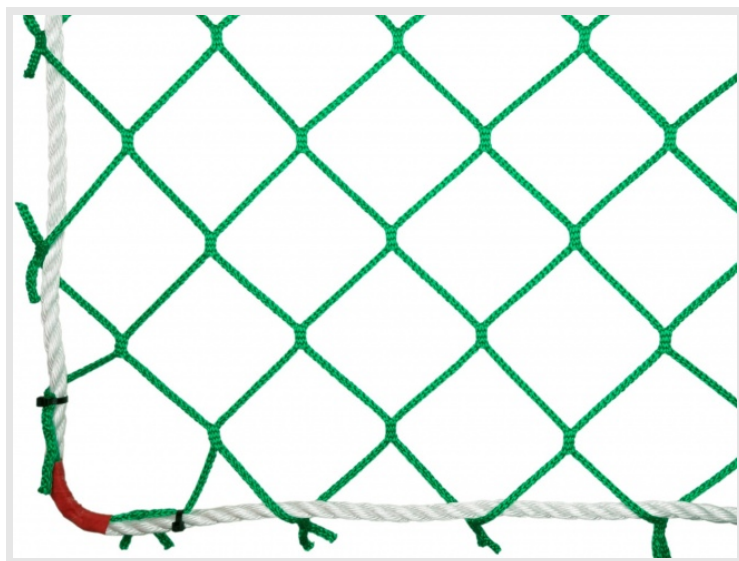

**TECHNICAL DATA**

Available Colors	green
Dimensions	24' 7" x 49' 3"
Material	high tenacity polypropylene, knotless
Material Diameter	Ø 0.19" (316")
Mesh Size	4.0" x 4.0"
Pose of Meshes	rhombic (diamond mesh)
Mesh Connection	knotless braid
Edge Design	with edged rope
Edged Rope	polysteel rope (Ø 12", white), all around
Max. Tensile Strength of a Mesh	670 lbf
Energy Absorption (approx.)	5.0 kJ
Tensile Strength of Edged Rope	6,700 lbf
Tensile Breaking Force Referred to Density	7.0 cN/den
Breaking Elongation of Filament	15%
Standards and Rules	BG regulation no. 179, DGUV standard 101-011, EN 1263-1
Certificate	GS verification certificate 23100031, Oeko-Tex®; certificate 12.0.02466
Net Class	A2
Safety Net System	S (rope-edged safety net)
Regular Inspection Interval	12 months
Number of Test Meshes	3 pcs.
Continuous Operating Temperature	-40 to +175 °F
Melting Point	329 °F
Washing Temperature (max.)	80 °F

<b>Yarn Moisture Regain</b>	0%
<b>Tensile Strength Reduction Because Of Moisture</b>	0%
<b>Resistance to Weak/Strong Acids</b>	very good/good
<b>Resistance to Weak/Strong Alkalis</b>	good/not good
<b>Resistance to Organic Solvents</b>	good
<b>Resistance to Benzine and Greases</b>	very good
<b>Bending Strength &amp; Abrasion Resistance</b>	good
<b>Weather-Resistance</b>	good
<b>UV-Resistance</b>	300 kly
<b>Tensile Strength After Two Years of Climatic Influences</b>	90%
<b>Elasticity After Years of Climatic Influences</b>	good long-term flexibility, little elongation
<b>Flexibility When Used in Water</b>	stays flexible
<b>Contraction When Used in Water</b>	low contraction
<b>Contraction When Used Outside</b>	no contraction
<b>Behavior in High Heat / Fire</b>	melting
<b>Electrical Characteristics</b>	isolating, no electrical conductivity
<b>Customs Tariff No.</b>	56081930
<b>Area Density</b>	8.10 oz/yd <sup>2</sup>
<b>Total Weight</b>	47.85 lb