


Product Data Sheet Item No. 592000-300-61

Belt Strap Cargo Net For Lorries 3050 x 6050 mm - Complete Set

Schutznetze24 GmbH
Weyerberg 5, DE-35614 Aßlar-Berghausen
Phone: +49 (0) 6443 - 436 96 40
Mail: office@safetynet365.com
Web: www.safetynet365.com

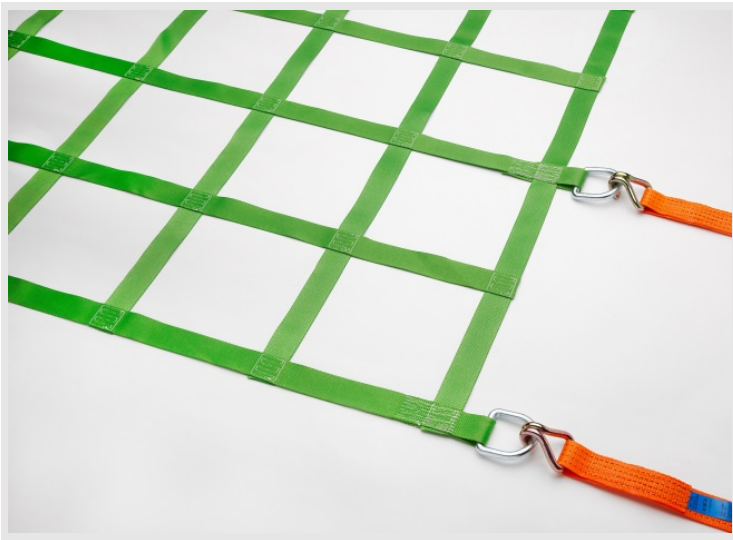

TECHNICAL DATA

| | |
|--|--|
| Available Colors | green |
| Dimensions | 10' x 19' 10" |
| Material | polyester |
| Strap Width | 2.00" |
| Mesh Size | 12.0" x 12.0" |
| Pose of Meshs | quadratic (square) |
| Mesh Connection | seamed |
| Edge Design | with D rings |
| Eyelets | D rings out of steel, directly sewn to the strap, diameter approx. 55 mm, in webbing loop, adds in total approx. 70 mm |
| Permissible Tensile Force | 4,500 lbf (lashing point), 12,500 lbf (net total) |
| Breaking Elongation of Filament | 10% |
| Standards and Rules | EN 12195-2, VDI standard 2700 |
| Certificate | GS verification certificate |
| Continuous Operating Temperature | -40 to +212 °F |
| Melting Point | 500 °F |
| Washing Temperature (max.) | 190 °F |
| Yarn Moisture Regain | 0.5 to 2.0% |
| Tensile Strength Reduction Because Of Moisture | 0% |
| Resistance to Weak/Strong Acids | good/not good |
| Resistance to Weak/Strong Alkalis | good/good |
| Resistance to Organic Solvents | good |
| Resistance to Benzine and Greases | good |
| Bending Strength & Abrasion Resistance | good |

| | |
|--|--|
| Tensile Strength After Two Years of Climatic Influences | 90% |
| Elasticity After Years of Climatic Influences | good long-term flexibility, little elongation |
| Flexibility When Used in Water | stays flexible |
| Contraction When Used in Water | low contraction |
| Contraction When Used Outside | no contraction |
| Behavior in High Heat / Fire | melting |
| Electrical Characteristics | isolating, no electrical conductivity |
| Included Parts | cargo net incl. 8 tension belts (two-piece load restraint assembly, max. tensile force: 4500 lbf, length: 13') |
| Customs Tariff No. | 63079010 |
| Total Weight | 48.51 lb |