


# Product Data Sheet Item No. 1903F060

## Flame-Retardant Fall Safety Net by the m<sup>2</sup> (Custom-Made)

Schutzenetz24 GmbH  
Weyerberg 5, DE-35614 Aßlar-Berghausen  
Phone: +49 (0) 6443 - 436 96 40  
Mail: office@safetynet365.com  
Web: www.safetynet365.com

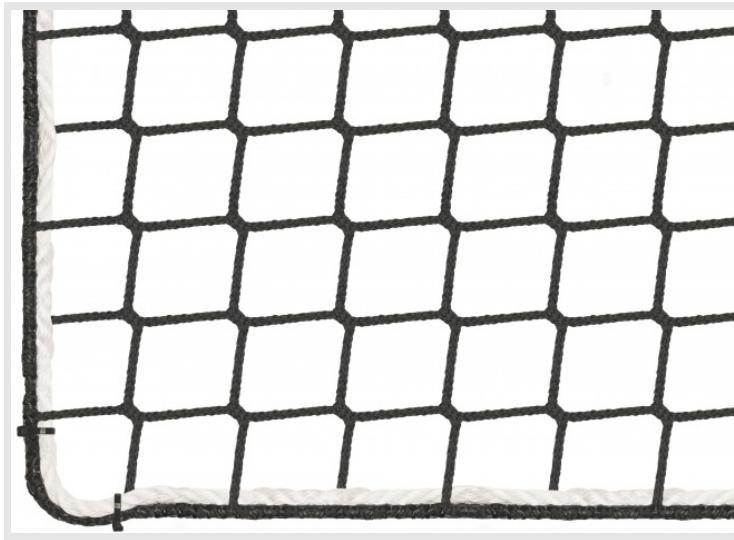

### TECHNICAL DATA

Available Colors	black
Material	high tenacity polypropylene, knotless, flame-retardant
Material Diameter	Ø 0.20" (316")
Mesh Size	2.4" x 2.4"
Pose of Meshes	quadratic (square)
Mesh Connection	knotless braid
Edge Design	reinforced selvage cord of approx. 38", with edged rope
Edged Rope	polysteel rope (Ø 12", white), all around
Max. Tensile Strength of a Mesh	720 lbf
Energy Absorption (approx.)	6.1 kJ
Tensile Strength of Edged Rope	6,700 lbf
Tensile Breaking Force Referred to Density	7.0 cN/den
Breaking Elongation of Filament	15%
Standards and Rules	BG regulation no. 179, DGUV standard 101-011, EN 1263-1, EN 13501-1 (flame-retarding), classification B-s1 d2, DIN 4102 (B1, flame-retarding)
Certificate	GS verification certificate 23100029, MPA-Bau certification report P-NDS04-851, Oeko-Tex®; certificate 12.0.02466
Net Class	A1
Safety Net System	S (rope-edged safety net)
Regular Inspection Interval	12 months
Number of Test Meshes	3 pcs.
Continuous Operating Temperature	-40 to +175 °F
Melting Point	329 °F
Washing Temperature (max.)	80 °F

<b>Yarn Moisture Regain</b>	0%
<b>Tensile Strength Reduction Because Of Moisture</b>	0%
<b>Resistance to Weak/Strong Acids</b>	very good/good
<b>Resistance to Weak/Strong Alkalies</b>	good/not good
<b>Resistance to Organic Solvents</b>	good
<b>Resistance to Benzene and Greases</b>	very good
<b>Bending Strength &amp; Abrasion Resistance</b>	good
<b>Weather-Resistance</b>	good
<b>UV-Resistance</b>	300 kly
<b>Tensile Strength After Two Years of Climatic Influences</b>	90%
<b>Elasticity After Years of Climatic Influences</b>	good long-term flexibility, little elongation
<b>Flexibility When Used in Water</b>	stays flexible
<b>Contraction When Used in Water</b>	low contraction
<b>Contraction When Used Outside</b>	no contraction
<b>Behavior in High Heat / Fire</b>	melting
<b>Electrical Characteristics</b>	isolating, no electrical conductivity
<b>Customs Tariff No.</b>	56081930
<b>Area Density</b>	12.10 oz/yd <sup>2</sup>