


Product Data Sheet Item No. 3005-045
Guardrail Net 1.50 x 5.00 m with Isilink Clips

Schutznetze24 GmbH
 Weyerberg 5, DE-35614 Aßlar-Berghausen
 Phone: +49 (0) 6443 - 436 96 40
 Mail: office@safetynet365.com
 Web: www.safetynet365.com

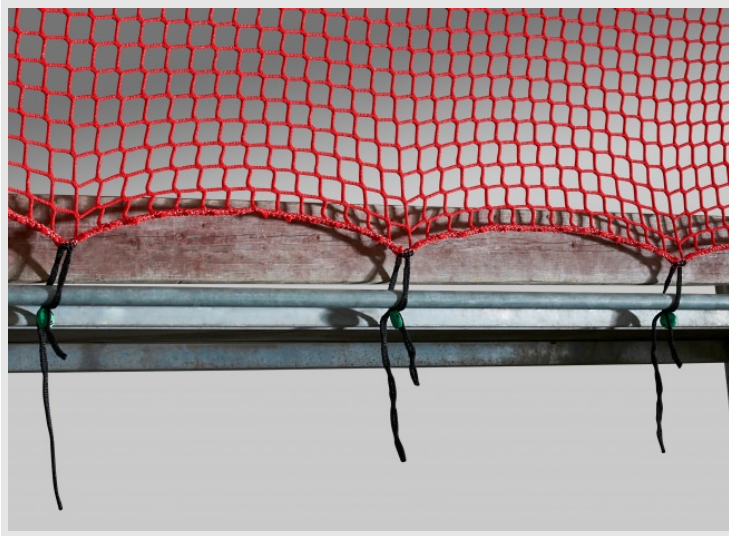

TECHNICAL DATA

| | |
|-------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| Available Colors | green, blue, red, fastest availability |
| Dimensions | 4' 11" x 16' 5" |
| Material | high tenacity polypropylene, knotless |
| Material Diameter | Ø 0.20" (316") |
| Mesh Size | 1.8" x 1.8" |
| Pose of Meshes | quadratic (square) |
| Mesh Connection | knotless braid |
| Edge Design | reinforced selvage cord of approx. 38", with integral surround rope and sewn Isilink clips (at an interval of 30" max., length approx. 25") |
| Max. Tensile Strength of a Mesh | 720 lbf |
| Energy Absorption (approx.) | 9.0 kJ |
| Tensile Breaking Force Referred to Density | 7.0 cN/den |
| Breaking Elongation of Filament | 15% |
| Standards and Rules | BG regulation no. 179, DGUV information 101-011, DGUV information 201-023, EN 1263-1 |
| Certificate | DGUV Eurotest verification certificate 24100008, Oeko-Tex® certificate 12.0.02466 |
| Net Class | B1 |
| Safety Net System | U (safety net in load-bearing construction for vertical use) |
| Regular Inspection Interval | 12 months |
| Number of Test Meshes | 3 pcs. |
| Continuous Operating Temperature | -40 to +175 °F |
| Melting Point | 329 °F |
| Washing Temperature (max.) | 80 °F |
| Yarn Moisture Regain | 0% |
| Tensile Strength Reduction Because Of Moisture | 0% |

| | |
|----------------------------------------------------------------|-----------------------------------------------|
| Resistance to Weak/Strong Acids | very good/good |
| Resistance to Weak/Strong Alkalis | good/not good |
| Resistance to Organic Solvents | good |
| Resistance to Benzine and Greases | very good |
| Bending Strength & Abrasion Resistance | good |
| Weather-Resistance | good |
| UV-Resistance | 300 kly |
| Tensile Strength After Two Years of Climatic Influences | 90% |
| Elasticity After Years of Climatic Influences | good long-term flexibility, little elongation |
| Flexibility When Used in Water | stays flexible |
| Contraction When Used in Water | low contraction |
| Contraction When Used Outside | no contraction |
| Behavior in High Heat / Fire | melting |
| Electrical Characteristics | isolating, no electrical conductivity |
| Customs Tariff No. | 56081930 |
| Area Density | 13.25 oz/yd ² |
| Total Weight | 8.16 lb |