
## **Product Data Sheet Item No. 7882-015**

Lawn Protection Fabric 2.40 x 5.00 m

Schutznetze24 GmbH Weyerberg 5, DE-35614 Aßlar-Berghausen Phone: +49 (0) 6443 - 436 96 40 Mail: office@safetynet365.com Web: www.safetynet365.com





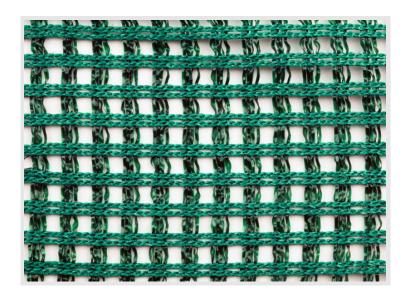

Dimensions         9x x 16 '5'           Material         polyethylene           Type of Textile         closemesh fabric panels, air and water permeable           Mesh Size         03'x x 03'           Shading         50%           Breaking Elongation of Filament         15%           Continuous Operating Temperature         20 to +140 °F           Melting Point         311 °F           Yarn Moisture Regain         0%           Resistance to Weak/Strong Akidis         9cod/good           Resistance to Weak/Strong Akidis         9cod/good           Resistance to Organic Solvents         9cod           Bedding Strength & Abrasion Resistance         9cod           Bedding Strength & Abrasion Resistance         9cod           UV-Resistance         250 kly           Bedistictly After Two Years of Climatic Influences         9cod           Belaticity After Years of Climatic Influences         9cod long-term flexibility, no elongation           Flexibility When Used in Water         15x signification           Contraction When Used in Water         15x signification           Contraction Thing Heaf / Fire         melling           Belavior in High Heaf / Fire         sickling, no electrical conductivity	TECHNICAL DATA	
Type of Textile closemesh fabric panels, air and water permeable  Mesh Size 0.3" x 0.3"  Shading 50%  Breaking Elongation of Filament 15%  Continuous Operating Temperature -20 to +140 °F  Melting Point 311 °F  Yarn Moisture Regain 0%  Tensile Strength Reduction Because Of Moisture 0%  Resistance to Weak/Strong Akids very good/good  Resistance to Uganic Solvents good  Resistance to Organic Solvents good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  Weather-Resistance UV-Resistance good  UV-Resistance Strength After Two Years of Climatic Influences good long-term flexibility, no elongation  Flexibility When Used in Water low contraction  Contraction When Used outside low contraction  melting melting	Dimensions	8' x 16' 5"
Mesh Size     0.3" x 0.3"       Shading     50%       Breaking Elongation of Filament     15%       Continuous Operating Temperature     -20 to +140 "F       Melting Point     311 "F       Yarn Moisture Regain     0%       Tensile Strength Reduction Because Of Moisture     0%       Resistance to Weak/Strong Acids     very good/good       Resistance to Organic Solvents     good       Resistance to Benzine and Greases     very good       Bending Strength & Abrasion Resistance     good       Weather-Resistance     good       UV-Resistance     250 kly       Tensile Strength After Two Years of Climatic Influences     good long-term flexibility, no elongation       Flexibility When Used in Water     stays flexible       Contraction When Used in Water     low contraction       Contraction When Used Outside     low contraction       Behavior in High Heat / Fire     melting	Material	polyethylene
Shading 50% Breaking Elongation of Filament 15% Continuous Operating Temperature -20 to +140 °F Melting Point 311 °F Yarn Moisture Regain 0% Tensile Strength Reduction Because Of Moisture 0% Resistance to Weak/Strong Acids very good/good Resistance to Weak/Strong Alkalis good/good Resistance to Organic Solvents good Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good UV-Resistance UV-Resistance 250 kly Tensile Strength After Two Years of Climatic Influences good long-term flexibility, no elongation Flexibility When Used in Water low contraction Contraction When Used Outside low contraction Behavior in High Heat / Fire melting	Type of Textile	closemesh fabric panels, air and water permeable
Breaking Elongation of Filament 15%  Continuous Operating Temperature -20 to +140 °F  Melting Point 311 °F  Yarn Moisture Regain 0%  Tensile Strength Reduction Because Of Moisture 0%  Resistance to Weak/Strong Acids very good/good  Resistance to Weak/Strong Alkalis good/good  Resistance to Organic Solvents good  Resistance to Benzine and Greases very good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  UV-Resistance Strength After Two Years of Climatic Influences good long-term flexibility, no elongation  Flexibility When Used in Water stays flexible  Contraction When Used Outside low contraction  Behavior in High Heat / Fire melting	Mesh Size	0.3" x 0.3"
Continuous Operating Temperature -20 to +140 °F  Melting Point 311 °F  Yarn Moisture Regain 0%  Tensile Strength Reduction Because Of Moisture 0%  Resistance to Weak/Strong Acids very good/good  Resistance to Weak/Strong Alkalis good/good  Resistance to Organic Solvents good  Resistance to Benzine and Greases very good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  UV-Resistance 250 kly  Tensile Strength After Two Years of Climatic Influences good long-term flexibility, no elongation  Flexibility When Used in Water stays flexible  Contraction When Used Outside low contraction  Behavlor in High Heat / Fire melting	Shading	50%
Melting Point Yarn Moisture Regain 0% Tensile Strength Reduction Because Of Moisture 0% Resistance to Weak/Strong Acids very good/good Resistance to Organic Solvents good Resistance to Benzine and Greases very good Bending Strength & Abrasion Resistance good UV-Resistance UV-Resistance UV-Resistance good UV-Resistance good Flexibility After Two Years of Climatic Influences good long-term flexibility, no elongation Flexibility When Used in Water Contraction When Used Outside low contraction  Contraction When Used Outside Behavior in High Heat / Fire  melting	Breaking Elongation of Filament	15%
Yarn Moisture Regain 0%  Tensile Strength Reduction Because Of Moisture 0%  Resistance to Weak/Strong Acids very good/good  Resistance to Weak/Strong Alkalis good/good  Resistance to Organic Solvents good  Resistance to Benzine and Greases very good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  UV-Resistance 250 kly  Tensile Strength After Two Years of Climatic Influences 90%  Elasticity After Years of Climatic Influences good long-term flexibility, no elongation  Flexibility When Used in Water low contraction  Contraction When Used Outside low contraction  Behavior in High Heat / Fire melting	Continuous Operating Temperature	-20 to +140 °F
Tensile Strength Reduction Because Of Moisture  Resistance to Weak/Strong Acids  Resistance to Weak/Strong Alkalis  good/good  Resistance to Organic Solvents  good  Resistance to Benzine and Greases  very good  Bending Strength & Abrasion Resistance  good  Weather-Resistance  UV-Resistance  250 kly  Tensile Strength After Two Years of Climatic Influences  good long-term flexibility, no elongation  Flexibility When Used in Water  Contraction When Used in Water  Contraction When Used Outside  Behavior in High Heat / Fire  melting	Melting Point	311 °F
Resistance to Weak/Strong Akalis good/good  Resistance to Organic Solvents good  Resistance to Benzine and Greases very good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  UV-Resistance good  UV-Resistance 50%  Elasticity After Two Years of Climatic Influences good long-term flexibility, no elongation  Flexibility When Used in Water stays flexible  Contraction When Used outside low contraction  Contraction When Used Outside low contraction  Behavior in High Heat / Fire melting	Yarn Moisture Regain	0%
Resistance to Weak/Strong Alkalis good/good  Resistance to Organic Solvents good  Resistance to Benzine and Greases very good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  UV-Resistance 250 kly  Tensile Strength After Two Years of Climatic Influences 90%  Elasticity After Years of Climatic Influences good long-term flexibility, no elongation  Flexibility When Used in Water stays flexible  Contraction When Used in Water low contraction  Contraction When Used Outside low contraction  Behavior in High Heat / Fire melting	Tensile Strength Reduction Because Of Moisture	0%
Resistance to Organic Solvents good  Resistance to Benzine and Greases very good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  UV-Resistance 250 kly  Tensile Strength After Two Years of Climatic Influences 90%  Elasticity After Years of Climatic Influences good long-term flexibility, no elongation  Flexibility When Used in Water stays flexible  Contraction When Used in Water low contraction  Contraction When Used Outside low contraction  Behavior in High Heat / Fire melting	Resistance to Weak/Strong Acids	very good/good
Resistance to Benzine and Greases very good  Bending Strength & Abrasion Resistance good  Weather-Resistance good  UV-Resistance 250 kly  Tensile Strength After Two Years of Climatic Influences 90%  Elasticity After Years of Climatic Influences good long-term flexibility, no elongation  Flexibility When Used in Water stays flexible  Contraction When Used in Water low contraction  Contraction When Used Outside low contraction  Behavior in High Heat / Fire melting	Resistance to Weak/Strong Alkalis	good/good
Bending Strength & Abrasion Resistance good  Weather-Resistance good  UV-Resistance 250 kly  Tensile Strength After Two Years of Climatic Influences 90%  Elasticity After Years of Climatic Influences good long-term flexibility, no elongation  Flexibility When Used in Water stays flexible  Contraction When Used in Water low contraction  Contraction When Used Outside low contraction  Behavior in High Heat / Fire melting	Resistance to Organic Solvents	good
Weather-Resistance good  UV-Resistance 250 kly  Tensile Strength After Two Years of Climatic Influences 90%  Elasticity After Years of Climatic Influences good long-term flexibility, no elongation  Flexibility When Used in Water stays flexible  Contraction When Used in Water low contraction  Contraction When Used Outside low contraction  Behavior in High Heat / Fire melting	Resistance to Benzine and Greases	very good
UV-Resistance 250 kly  Tensile Strength After Two Years of Climatic Influences 90%  Elasticity After Years of Climatic Influences good long-term flexibility, no elongation  Flexibility When Used in Water stays flexible  Contraction When Used in Water low contraction  Contraction When Used Outside low contraction  Behavior in High Heat / Fire melting	Bending Strength & Abrasion Resistance	good
Tensile Strength After Two Years of Climatic Influences 90%  Elasticity After Years of Climatic Influences good long-term flexibility, no elongation  Flexibility When Used in Water stays flexible  Contraction When Used in Water low contraction  Contraction When Used Outside low contraction  Behavior in High Heat / Fire melting	Weather-Resistance	good
Elasticity After Years of Climatic Influences good long-term flexibility, no elongation  Flexibility When Used in Water stays flexible  Contraction When Used in Water low contraction  Contraction When Used Outside low contraction  Behavior in High Heat / Fire melting	UV-Resistance	250 kly
Flexibility When Used in Water stays flexible  Contraction When Used in Water low contraction  Contraction When Used Outside low contraction  Behavior in High Heat / Fire melting	Tensile Strength After Two Years of Climatic Influences	90%
Contraction When Used in Water low contraction  Contraction When Used Outside low contraction  Behavior in High Heat / Fire melting	Elasticity After Years of Climatic Influences	good long-term flexibility, no elongation
Contraction When Used Outside low contraction  Behavior in High Heat / Fire melting	Flexibility When Used in Water	stays flexible
Behavior in High Heat / Fire melting	Contraction When Used in Water	low contraction
-	Contraction When Used Outside	low contraction
Electrical Characteristics isolating, no electrical conductivity	Behavior in High Heat / Fire	melting
	Electrical Characteristics	isolating, no electrical conductivity

Customs Tariff No.	63079010
Area Density	8.85 oz/yd²
Total Weight	8.27 lb