


# Product Data Sheet Item No. 1903-100/2007-020

## Safety Net with Overlay Net (100 mm Mesh)

Schutznetze24 GmbH  
Weyerberg 5, DE-35614 Aßlar-Berghausen  
Phone: +49 (0) 6443 - 436 96 40  
Mail: office@safetynet365.com  
Web: www.safetynet365.com

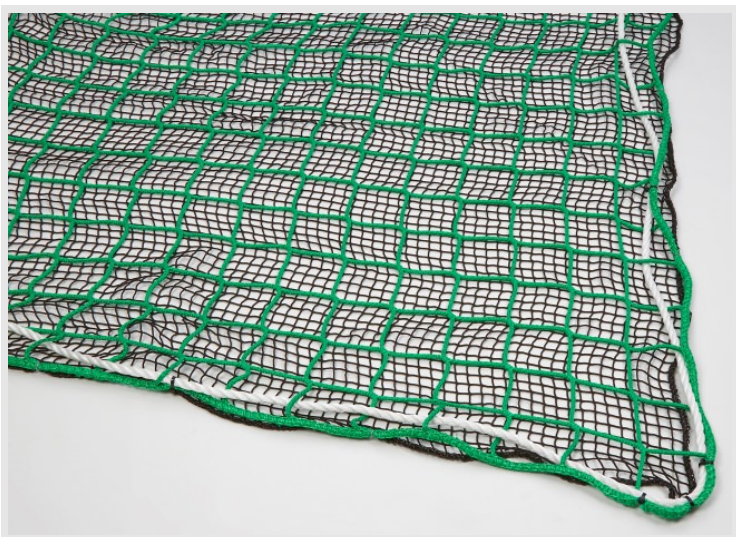

### TECHNICAL DATA

<b>Material</b>	high tenacity polypropylene, knotless
<b>Material Diameter</b>	Ø 0.07", Ø 0.20" (316")
<b>Mesh Size</b>	0.8" x 0.8", 4.0" x 4.0"
<b>Pose of Meshes</b>	quadratic (square)
<b>Mesh Connection</b>	knotless braid
<b>Edge Design</b>	reinforced selvage cord of approx. 38", with edged rope
<b>Edged Rope</b>	polysteel rope (Ø 12", white), all around
<b>Max. Tensile Strength of a Mesh</b>	720 lbf
<b>Energy Absorption (approx.)</b>	4.8 kJ
<b>Tensile Strength of Edged Rope</b>	6,700 lbf
<b>Tensile Breaking Force Referred to Density</b>	7.0 cN/den
<b>Breaking Elongation of Filament</b>	15%
<b>Standards and Rules</b>	BG regulation no. 179, DGUV standard 101-011, EN 1263-1
<b>Certificate</b>	GS verification certificate 23100030, Oeko-Tex&reg; certificate 12.0.02466
<b>Net Class</b>	A2
<b>Safety Net System</b>	S (rope-edged safety net)
<b>Regular Inspection Interval</b>	12 months
<b>Number of Test Meshes</b>	3 pcs.
<b>Washing Temperature (max.)</b>	80 °F
<b>Yarn Moisture Regain</b>	0%
<b>Tensile Strength Reduction Because Of Moisture</b>	0%
<b>Weather-Resistance</b>	good
<b>UV-Resistance</b>	300 kly
<b>Elasticity After Years of Climatic Influences</b>	good long-term flexibility, little elongation

<b>Flexibility When Used in Water</b>	stays flexible
<b>Contraction When Used in Water</b>	low contraction
<b>Contraction When Used Outside</b>	no contraction
<b>Electrical Characteristics</b>	isolating, no electrical conductivity
<b>Customs Tariff No.</b>	56081930
<b>Area Density</b>	11.95 oz/yd <sup>2</sup>